


# COPPER CRIMPING FORK TERMINALS (NON-INSULATED AND INSULATED)


Braco Fork Terminals are designed to offer maximum efficiency under heavy-duty applications. Therefore these terminals are ideal for use in applications which are subject to continuous mechanical vibrations viz. engines, railways, moving components etc. The terminal barrel is brazed and soft annealed which means that the terminal can be crimped in either direction. All the terminals are tin plated to avoid oxidation and to achieve maximum corrosion protection. These terminals can be provided with PVC sleeves for protection against electrical shocks and can also be provided with metal reinforced sleeves to maintain a proper grip on conductor insulation.

Colour Coding for Insulated Terminals :-

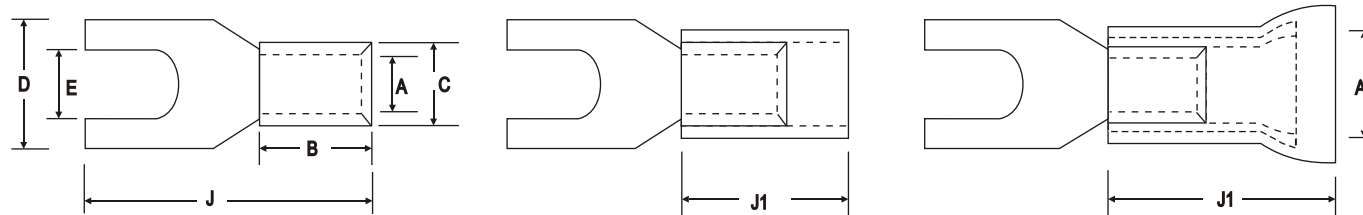

Material Copper BS : 1897  
Finish : Electro Tinned

Size Sq. mm	Dimensions						Code No.	Code No.	Code No.	Code No.	Code No.	
	E	A	C	D	B	J						J-1
1.5	5.1	1.6	3.2	8.0	5	21	F - 214	10	FI - 925	3.6	10	FD - 934
	3.5	1.6	3.2	6.8	4	13	F - 249	10	FI - 926	3.6	10	FD - 935
	3.0	2.0	2.8	6.2	5	13	F - 250	10	FI - 927	3.6	10	FD - 936
2.5	3.5	2.3	3.9	6.5	5	15	F - 251	10	FI - 928	4.4	10	FD - 937
	5.0	2.6	4.6	10.6	6.2	21	F - 280	10	FI - 929	4.4	10	FD - 938
4-6	3.1	3.5	5.5	6.0	6	15	F - 252	14	FI - 930	6.4	15	FD - 939
	3.5	3.5	5.5	6.0	6	15	F - 253	14	FI - 931	6.4	15	FD - 940
10	6.5	4.5	6.9	16.0	8	27	F - 254	16	FI - 932	6.8	17	FD - 941
	8.2	4.5	6.9	16.0	8	27	F - 255	16	FI - 933	6.8	17	FD - 942



Colour Coding for Insulated Terminals :-  
● 1.5 ● 2.5 ● 4.6