


BRACO COPPER CRIMPING RING TERMINALS (NON-INSULATED AND INSULATED)

Braco Ring Terminals are designed to offer maximum efficiency under heavy-duty applications. Therefore these terminals are ideal for use in applications which are subject to continuous mechanical vibrations viz. engines, railways, moving components etc. The terminal barrel is brazed and soft annealed, which means that the terminal can be crimped in either direction.

All the terminals are tin plated to avoid oxidization and to achieve maximum corrosion protection. These terminals can be provided with PVC sleeves for protection against electrical shocks and can also be provided with metal reinforced sleeves to maintain a proper grip on conductor insulation.

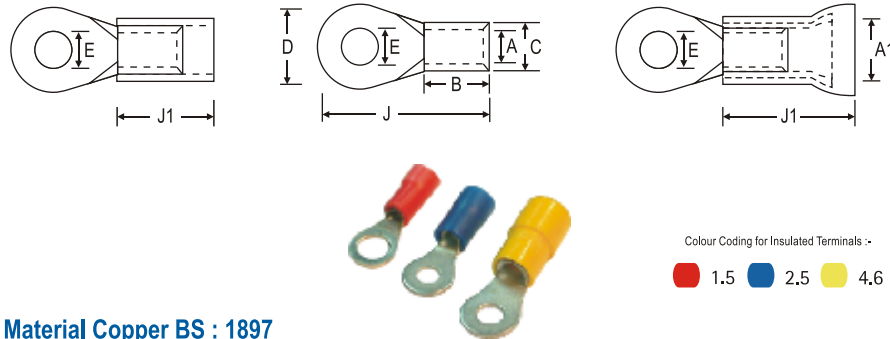


Material Copper BS : 1897
Finish : Electro Tinned

Size Sq. mm	Dimensions						Code No.	Code No.	Code No.			
	E	A	C	D	B	J				J-1	A-1	J-1
1.5	2.2	1.6	3.2	6.0	5	14.0	R - 103	10	RI - 052	3.6	10	RD - 435
	2.6	1.6	3.2	6.0	5	14.0	R - 000	10	RI - 053	3.6	10	RD - 436
	3.2	1.6	3.2	6.0	5	14.0	R - 001	10	RI - 054	3.6	10	RD - 437
	3.7	1.6	3.2	6.0	5	14.0	R - 002	10	RI - 055	3.6	10	RD - 438
	4.2	1.6	3.2	6.0	5	14.0	R - 003	10	RI - 056	3.6	10	RD - 439
	3.2	1.6	3.2	6.8	5	13.0	R - 153	10	RI - 057	3.6	10	RD - 440
	3.7	1.6	3.2	6.8	5	13.0	R - 048	10	RI - 058	3.6	10	RD - 441
	4.2	1.6	3.2	6.8	5	13.0	R - 049	10	RI - 059	3.6	10	RD - 442
	3.2	1.6	3.2	8.0	5	16.0	R - 104	10	RI - 060	3.6	10	RD - 443
	4.2	1.6	3.2	8.0	5	16.0	R - 004	10	RI - 061	3.6	10	RD - 444
	5.2	1.6	3.2	8.0	5	16.0	R - 005	10	RI - 062	3.6	10	RD - 445
	4.2	1.6	3.2	7.0	5	14.5	R - 154	10	RI - 063	3.6	10	RD - 446
	4.2	1.6	3.2	10.0	5	18.0	R - 105	10	RI - 064	3.6	10	RD - 447
	5.2	1.6	3.2	10.0	5	18.0	R - 006	10	RI - 065	3.6	10	RD - 448
	6.4	1.6	3.2	10.0	5	18.0	R - 007	10	RI - 066	3.6	10	RD - 449
	6.4	1.6	3.2	12.0	5	18.0	R - 106	10	RI - 067	3.6	10	RD - 450

Size Sq. mm	Dimensions						Code No.	Code No.	Code No.				
	E	A	C	D	B	J				J-1	A-1	J-1	
2.5	3.2	2.3	3.9	6.5	5	12.7	R - 107	10	RI - 068	4.4	10	RD - 451	
	3.7	2.3	3.9	6.5	5	12.7	R - 008	10	RI - 069	4.4	10	RD - 452	
	3.7	2.3	3.9	8.0	5	16.0	R - 108	10	RI - 070	4.4	10	RD - 453	
	4.2	2.3	3.9	8.0	5	16.0	R - 009	10	RI - 071	4.4	10	RD - 454	
	5.2	2.3	3.9	8.0	5	16.0	R - 010	10	RI - 072	4.4	10	RD - 455	
	5.2	2.3	3.9	10.0	5	18.0	R - 109	10	RI - 073	4.4	10	RD - 456	
	6.4	2.3	3.9	10.0	5	18.0	R - 011	10	RI - 074	4.4	10	RD - 457	
	5.2	2.3	3.9	12.0	5	22.0	R - 110	10	RI - 075	4.4	10	RD - 458	
	6.4	2.3	3.9	12.0	5	22.0	R - 012	10	RI - 076	4.4	10	RD - 459	
	8.2	2.3	3.9	12.0	5	22.0	R - 013	10	RI - 077	4.4	10	RD - 460	
	6.4	2.3	3.9	16.0	5	25.0	R - 111	10	RI - 078	4.4	10	RD - 461	
	8.2	2.3	3.9	16.0	5	25.0	R - 014	10	RI - 079	4.4	10	RD - 462	
	10.2	2.3	3.9	16.0	5	25.0	R - 015	10	RI - 080	4.4	10	RD - 463	
	10.2	2.3	3.9	18.0	5	29.0	R - 151	10	RI - 081	4.4	10	RD - 464	
	12.7	2.3	3.9	18.0	5	29.0	R - 047	10	RI - 082	4.4	10	RD - 465	
	4-6	4.2	3.5	5.5	8.0	6	17.0	R - 155	14	RI - 083	6.4	15	RD - 466
		5.2	3.5	5.5	8.0	6	17.0	R - 050	14	RI - 084	6.4	15	RD - 467
		4.2	3.5	5.5	10.0	6	19.0	R - 112	14	RI - 085	6.4	15	RD - 468
5.2		3.5	5.5	10.0	6	19.0	R - 016	14	RI - 086	6.4	15	RD - 469	
5.2		3.5	5.5	8.0	6	22.0	R - 157	14	RI - 087	6.4	15	RD - 470	
5.2		3.5	5.5	12.0	6	20.0	R - 113	14	RI - 088	6.4	15	RD - 471	
6.4		3.5	5.5	12.0	6	20.0	R - 017	14	RI - 089	6.4	15	RD - 472	
8.2		3.5	5.5	12.0	6	20.0	R - 018	14	RI - 090	6.4	15	RD - 473	
5.2		3.5	5.5	12.0	6	22.0	R - 114	14	RI - 091	6.4	15	RD - 474	
6.4		3.5	5.5	12.0	6	22.0	R - 019	14	RI - 092	6.4	15	RD - 475	
6.4		3.5	5.5	14.0	6	25.5	R - 115	14	RI - 093	6.4	15	RD - 476	
8.2		3.5	5.5	14.0	6	25.5	R - 020	14	RI - 094	6.4	15	RD - 477	
9.7		3.5	5.5	14.0	6	25.5	R - 021	14	RI - 095	6.4	15	RD - 478	
8.2		3.5	5.5	16.0	6	30.0	R - 116	14	RI - 096	6.4	15	RD - 479	
10.2		3.5	5.5	16.0	6	30.0	R - 022	14	RI - 097	6.4	15	RD - 480	
8.2		3.5	5.5	18.0	6	30.0	R - 117	14	RI - 098	6.4	15	RD - 481	
10.2		3.5	5.5	18.0	6	30.0	R - 023	14	RI - 099	6.4	15	RD - 482	
12.7		3.5	5.5	18.0	6	30.0	R - 024	14	RI - 100	6.4	15	RD - 483	
10	4.2	4.3	6.3	10.0	8	22.0	R - 118	16	RI - 389	6.8	17	RD - 484	
	8.2	4.3	6.3	18.0	8	22.0	R - 025	16	RI - 395	6.8	17	RD - 485	

BRACO COPPER CRIMPING RING TERMINALS (NON-INSULATED)

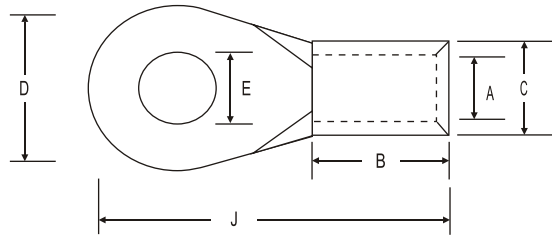

Size Sq. mm	Dimensions						Code No.
	E	A	C	D	B	J	
10	5.2	4.3	6.3	10	8	20	R - 026
	6.4	4.3	6.3	12	8	23	R - 120
	8.2	4.3	6.3	16	8	27	R - 121
	8.2	4.3	6.3	18	8	30	R - 122
	10.2	4.3	6.3	18	8	30	R - 027
	10.2	4.3	6.3	22	8	34	R - 123
	12.7	4.3	6.3	22	8	34	R - 028
16	5.2	5.6	8.0	10	10	24	R - 124
	5.2	5.6	8.0	12	10	26	R - 125
	6.4	5.6	8.0	12	10	26	R - 029
	6.4	5.6	8.0	16	10	30	R - 126
	8.2	5.6	8.0	16	10	30	R - 030
	9.7	5.6	8.0	16	10	30	R - 031
	8.2	5.6	8.0	18	10	33	R - 127
	10.2	5.6	8.0	18	10	33	R - 032
	10.2	5.6	8.0	22	10	35	R - 128
	12.7	5.6	8.0	22	10	35	R - 033
	25	6.4	7.5	11.1	12	11	31
8.2		7.5	11.1	12	11	31	R - 051
6.4		7.5	11.1	16	11	30	R - 129
8.2		7.5	11.1	16	11	30	R - 034
10.2		7.5	11.1	16	11	30	R - 035
6.4		7.5	11.1	16	11	33	R - 130
8.2		7.5	11.1	16	11	33	R - 036
10.2		7.5	11.1	18	11	34	R - 131
10.2		7.5	11.1	22	11	42	R - 132
12.7		7.5	11.1	22	11	42	R - 037

Size Sq. mm	Dimensions						Code No.
	E	A	C	D	B	J	
35	6.4	9.0	12.6	16	12	31	R - 133
	8.2	9.0	12.6	16	12	31	R - 038
	8.2	9.0	12.6	18	12	36	R - 134
	10.2	9.0	12.6	18	12	36	R - 039
	10.2	9.0	12.6	22	12	42	R - 135
	12.7	9.0	12.6	22	12	42	R - 040
	50	8.2	10.5	14.1	18	16	43
10.2		10.5	14.1	18	16	43	R - 041
10.2		10.5	14.1	22	16	43	R - 137
10.2		10.5	14.1	24	16	48	R - 138
12.7		10.5	14.1	24	16	48	R - 042
16.2		10.5	14.1	32	16	54	R - 139
70	10.2	12.0	16.0	22	18	47	R - 140
	12.7	12.0	16.0	22	18	47	R - 043
	12.7	12.0	16.0	24	18	48	R - 141
	16.2	12.0	16.0	28	18	54	R - 142
95	10.2	13.5	18.1	22	20	46	R - 143
	10.2	13.5	18.1	24	20	50	R - 144
	12.7	13.5	18.1	24	20	50	R - 044
	16.2	13.5	18.1	28	20	58	R - 145
120	12.7	15.0	20.2	26	22	52	R - 146
	16.2	15.0	20.2	32	22	64	R - 147
	20.3	15.0	20.2	40	22	72	R - 148
150	12.7	16.5	23.7	34	24	66	R - 149
	16.2	16.5	23.7	34	24	66	R - 045
	20.3	16.5	23.7	40	24	74	R - 046